

## ELECTROPERMANENT MAGNETIC CHUCKS LINI-POL / FOR GRINDING

### CHARACTERISTICS

Standard pitch pol 20-4: 20 mm iron - 4 mm brass.  
Other available pitch poles: 15-4, 10-3 and 6-3 mm  
Attraction force: 12 daN / cm<sup>2</sup>.

Uniform magnetic field.


Tightness guaranteed: submersible in liquid dielectric. Includes two end stops and 4 m cable from the chuck to the electronic control.

Voltage single phase 380 V.


It is equipped with a remote control for the magnetization and demagnetization of the chuck. It allows power regulation.

It incorporates a safety contact which prevents the machine being started if the chuck is not magnetized.

Protection: IP67

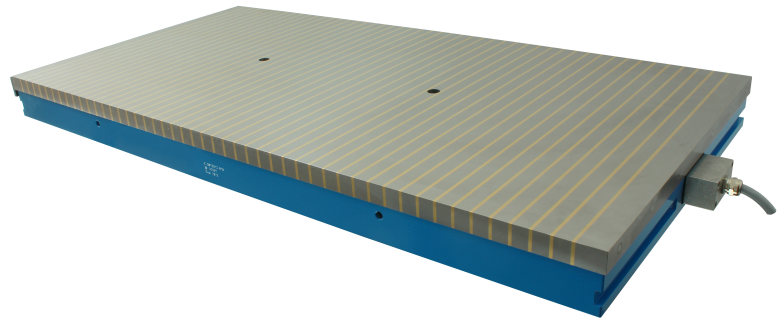

| CODE      | A mm | B mm | C mm | POLAR PITCH<br>Iron-Brass | WEIGHT<br>Kg |
|-----------|------|------|------|---------------------------|--------------|
| 30.21.010 | 400  | 200  | 85   | 15-4 mm                   | 50           |
| 30.21.012 | 500  | 200  | 85   | 15-4 mm                   | 65           |
| 30.21.014 | 600  | 200  | 85   | 15-4 mm                   | 78           |
| 30.21.018 | 800  | 200  | 85   | 15-4 mm                   | 95           |
| 30.21.212 | 500  | 300  | 85   | 20-4 mm                   | 99           |
| 30.21.214 | 600  | 300  | 85   | 20-4 mm                   | 119          |
| 30.21.218 | 800  | 300  | 85   | 20-4 mm                   | 158          |
| 30.21.222 | 1000 | 300  | 85   | 20-4 mm                   | 198          |
| 30.21.414 | 600  | 400  | 85   | 20-4 mm                   | 158          |
| 30.21.418 | 800  | 400  | 85   | 20-4 mm                   | 211          |
| 30.21.422 | 1000 | 400  | 85   | 20-4 mm                   | 263          |
| 30.21.423 | 1200 | 400  | 85   | 20-4 mm                   | 316          |
| 30.21.618 | 800  | 500  | 85   | 20-4 mm                   | 262          |
| 30.21.622 | 1000 | 500  | 85   | 20-4 mm                   | 329          |
| 30.21.623 | 1200 | 500  | 85   | 20-4 mm                   | 395          |
| 30.21.818 | 800  | 600  | 85   | 20-4 mm                   | 316          |
| 30.21.822 | 1000 | 600  | 85   | 20-4 mm                   | 395          |
| 30.21.823 | 1200 | 600  | 85   | 20-4 mm                   | 474          |

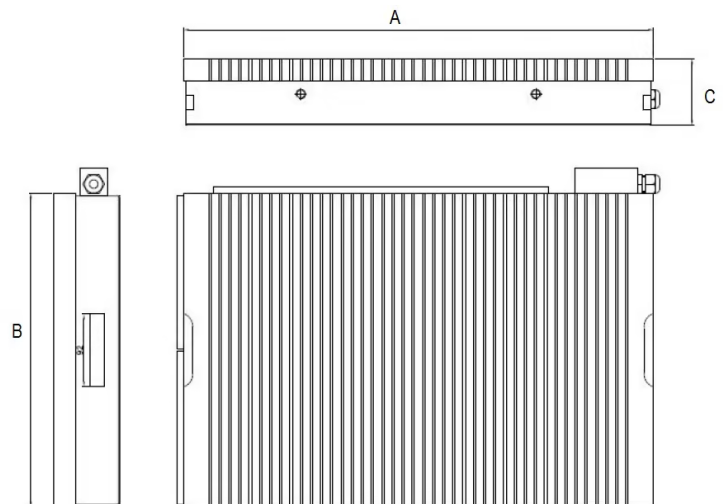

### ELECTRONIC CONTROL

Voltage single phase 380 V.

It is equipped with a remote control for the magnetization and demagnetization of the chuck. It allows power regulation.

It incorporates a safety contact which prevents the machine being started if the chuck is not magnetized.

Protection: IP67

Code 71.53.051-021

Weight: 5 Kg

