

2.2 MAGNETIC BARS

BASIC MODEL

Magnetic bars can be installed at all possible points in a solid or liquid product transport system and act as a filter. These bars incorporate an extremely powerful Neodymium magnet system, housed in a stainless steel airtight housing. The bars can be installed perpendicular to the conveyor system, so that the flow of material will pass between the bars, which will act as "fingers".


To simplify installation, they can be supplied with threaded holes at one end or at both ends. They also manufacture without holes. The sophisticated configuration of the magnets inside the tube provides an extremely powerful and intense magnetic field. Thus, the design allows us to achieve the optimal combination between the attraction force and the maximum depth of field.

CHARACTERISTICS:

- Design: Solid construction
- Without, with one or two threaded holes
- Housing: Stainless steel 1.4404
- Watertight
- Surface treatment: Polished
- Magnetic part: Permanent Neodymium magnets quality N35



Product manufactured according to EHEDG standards, which guarantee the correct hygienic design and maintenance of food production systems.

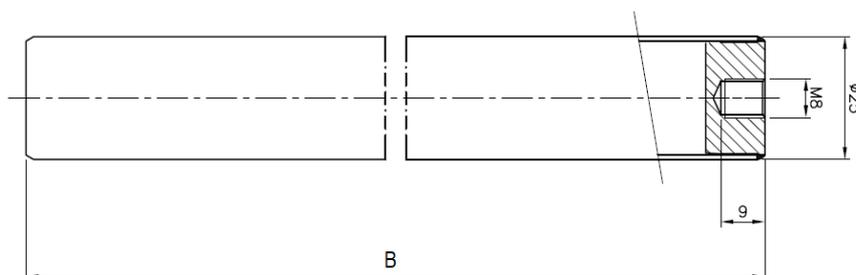

CODE	A mm	B mm	FIXING HOLES	WEIGHT Kg
20.30.002	Ø25	100	2xM8	0,4
20.30.003	Ø25	150	2xM8	0,6
20.30.004	Ø25	200	2xM8	0,8
20.30.005	Ø25	250	2xM8	1
20.30.006	Ø25	300	2xM8	1,2
20.30.007	Ø25	350	2xM8	1,4
20.30.008	Ø25	400	2xM8	1,6
20.30.009	Ø25	450	2xM8	1,8
20.30.010	Ø25	500	2xM8	2

Other dimensions under request