

Electro-holding magnet

Energise to hold - 30mm diameter

12VDC or 24VDC Operating voltage

Part numbers
M52173/12VDC
M52173/24VDC




Pull gaps

Air gap (mm)	Magnetic Pull* (N)
0.00	150
0.09	51
0.18	22
0.27	12
0.36	8
0.59	4
1.00	2

* +/- 10% at room temperature

To achieve the optimum pull force 100% contact area must be achieved using the recommended armature plate. The force will be affected if other material specifications, thicknesses and surfaces are used, or if the armature fails to make positive contact over the full diameter of the face of the magnet. Where misalignment is likely to be an issue we recommend that an oversized armature plate is used to ensure 100% full contact, this however will reduce the stated pull force by approximately 10%.

Dimensions

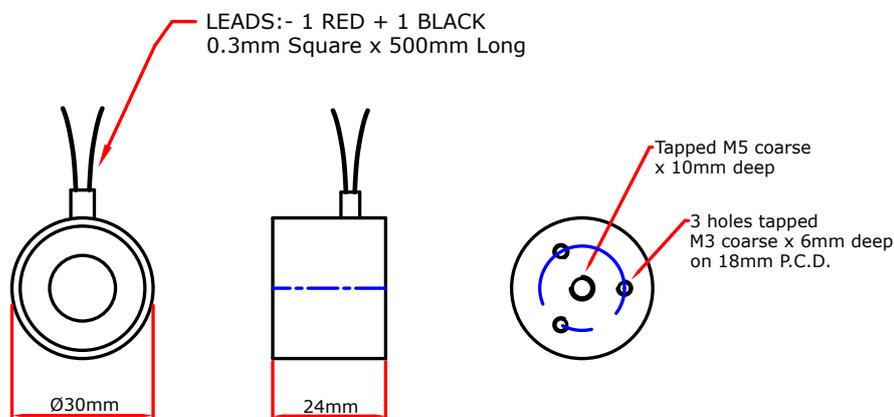

If you have any more questions, require technical assistance and would like a quotation, simply contact us.

www.eclipsemagnetics.com

Eclipse Magnetics Ltd, Atlas Way, Sheffield, S4 7QQ, England
T +44 (0)114 225 0600 F +44 (0)114 225 0525 E info@eclipsemagnetics.com

While every effort has been made to ensure the accuracy of the information in this publication please note that specifications may change without notice.



Description

Mountings	Threaded holes in rear face
Finish	Bright nickel plated with machined face
Product weight	66g

Technical Data

Typical holding force	150N
ED rating	100%
IP Rating	54
Standard operating voltage	12VDC (M52172/12VDC) 24VDC (M52172/24VDC)
Current	12V - 180mA 24V - 90mA
Power consumption	2.16W

Connection type

12VDC and 24VDC	Free leads (500mm long)
------------------------	-------------------------

Recommended armature plate



Finish	Bright nickel plated
Diameter	30mm
Height	4mm
Screw	M4
Part No.	M52171/25ARM
Weight	15g